




Systemvertrieb Innovativer Holzbauprodukte
Gmunden Austria

SIHGA® GmbH | Gewerbepark Kleinreith 4
A-4694 Ohlsdorf bei Gmunden
Telefon: +43 7612-74370-0
Fax: +43 7612-74370-10
E-Mail: info@sihga.com
Web: www.sihga.com

BeziFix® SR

Caractéristiques techniques

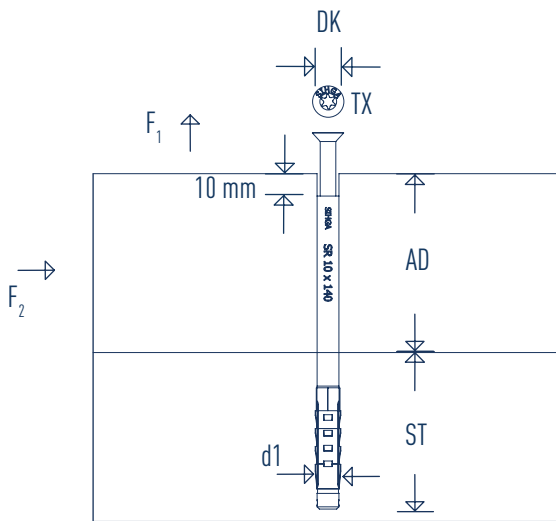

Dimensions [mm]

BeziFix® SR

d ₁	TX	DK	ST
10	40	14	70

SIHGA®		Dimensions	Pièce fonctionnelle	Valeurs recommandées	
montagepack		BeziFix® SR	AD	Traction F ₁ / Quer F ₂	Traction F ₁ / Quer F ₂
Art. Nr.	VE	d ₁ x L	[mm]	HLZ [kN]	Béton [kN]
33016	50	10 x 80	20	1,00	4,50
33026	50	10 x 100	40	1,00	4,50
33036	50	10 x 120	60	1,00	4,50
33046	50	10 x 140	80	1,00	4,50
33056	50	10 x 160	100	1,00	4,50
33066	50	10 x 180	120	1,00	4,50
33076	50	10 x 200	140	1,00	4,50
33086	50	10 x 230	170	1,00	4,50
33096	50	10 x 260	200	1,00	4,50

Profondeur de posage minimum de 70 mm dans le murage portant.
HLZ = brique perforée

TAKE THE BEST

